

**BT380** Single Water Tap, Bench Mounted



**Application:** Laboratory water tap for cold water.

**Mounting:** Bench or countertop mounted with locator pins.

**Body:** Forged brass.

**Headwork:** WaterSaver self-contained compression valve cartridge with replaceable stainless steel seat.

**Handle:** Molded nylon hooded style handle with index disc. Handle and index are color coded and marked per EN 13792.

**Riser:** Brass riser with 150mm (6") spread.

**Inlet:** Furnished with G1/2 mounting shank, locknut and washer. G1/2 male inlet.

**Outlet:** G3/8 female outlet with removable anti-splash serrated hose end.

**Quality Assurance:** Fitting is fully assembled and factory tested prior to shipment. 10 bar (150 PSI) test pressure and maximum working pressure.

**Ordering Information**

**Options**

<b>Valve Construction</b>	Compression valve cartridge	<input type="checkbox"/> BT380
	Ceramic disc valve cartridge	<input type="checkbox"/> BTC380
<b>Riser</b>	Riser with 200mm (8") spread in place of 150mm (6")	<input type="checkbox"/> BT380-8
<b>Outlet Fitting</b>	BO055 aerator in place of hose end	<input type="checkbox"/> BT380-55
	BT118 pipe interrupter fitting with hose end	<input type="checkbox"/> BT380-118

**Product Finish**


<input type="checkbox"/> WHT	Gloss white powder coated finish	<input type="checkbox"/> PCL	Polished chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRY	Gloss light gray powder coated finish	<input type="checkbox"/> SCC	Satin chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRD	Gloss dark gray powder coated finish	<input type="checkbox"/> SNC	Satin nickel plated finish with clear epoxy coating
<input type="checkbox"/> STM	Starburst metallic powder coated finish		

**Note:** Refer to "Product Finishes" catalog for complete information on finishes.

**Media**

\_\_\_\_\_

BT380 Single Water Tap, Bench Mounted

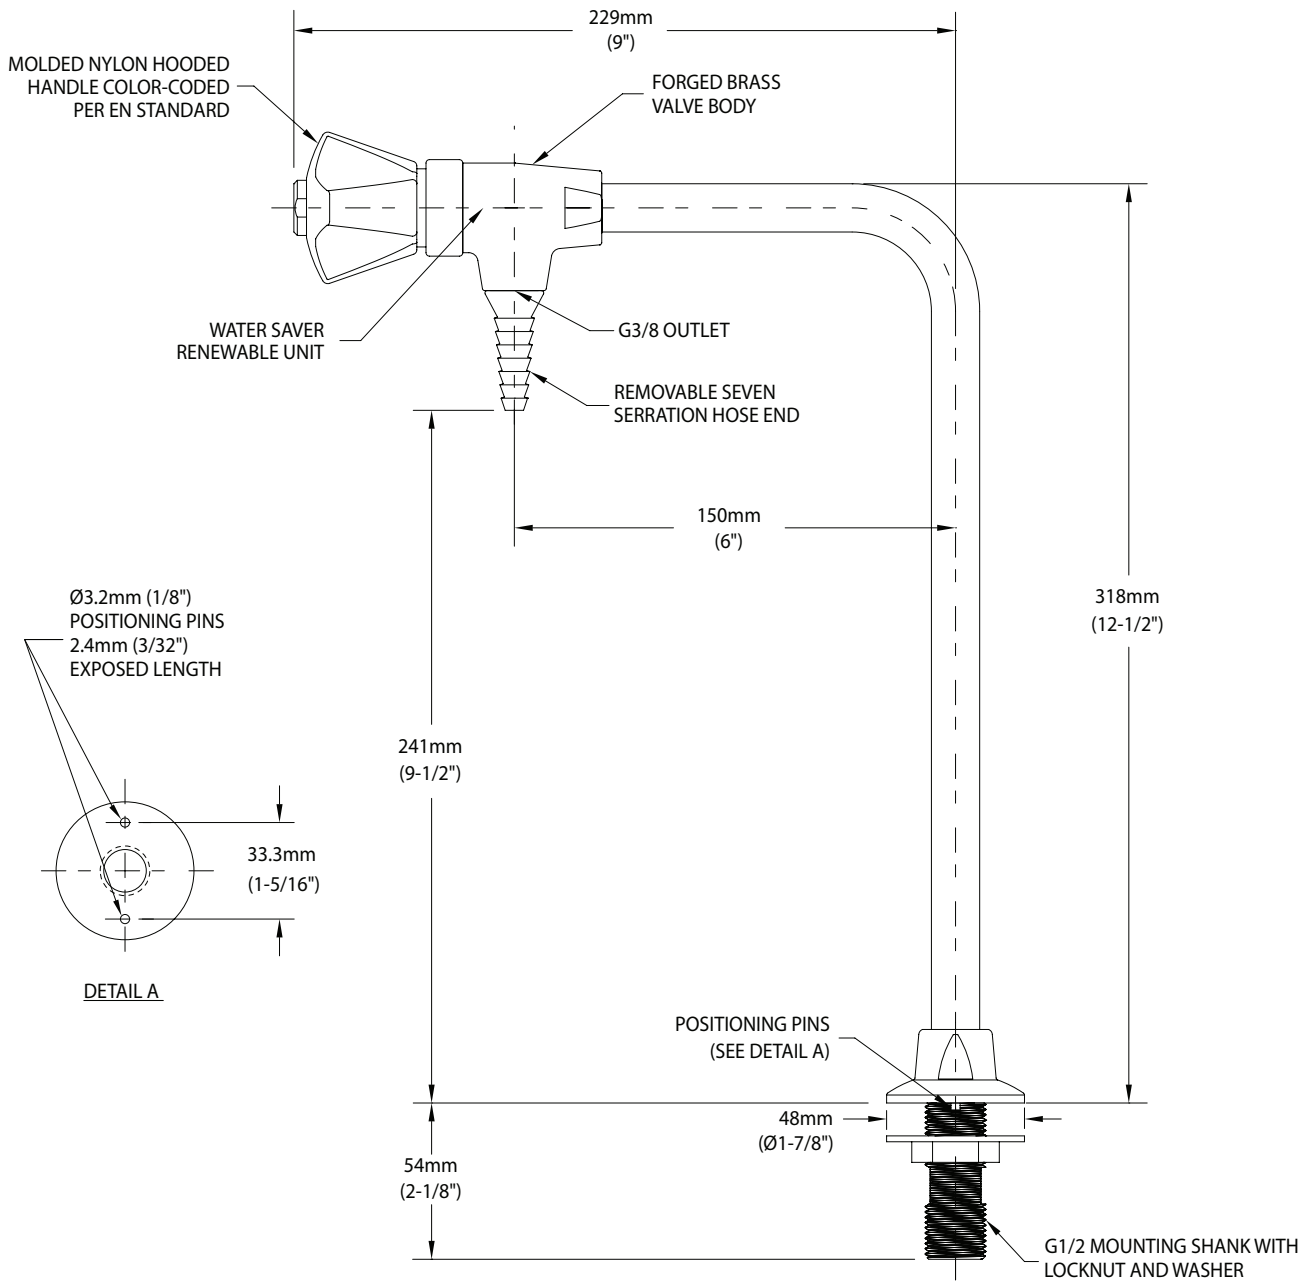

NOTES:

1. FITTING IS FULLY ASSEMBLED AND FACTORY TESTED PRIOR TO SHIPMENT.
2. MAXIMUM WORKING PRESSURE IS 10 BAR (150 PSI).

Rev. 052318

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 6mm (1/4"). Rev. 071718