

- ESBF658** Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head and Pipe
- ESBF658PCC** Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head, Polished Chrome Plated Pipe



**Application:** Barrier-Free emergency shower for semi-concealed mounting in a finished ceiling. Unit is designed for installation in ceilings 8-10 feet above finished floor.

**ADA Compliance:** When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

**Shower Head:** 10" diameter stainless steel with 20 GPM flow control. Furnished with vertical supply pipe and ceiling escutcheon for mounting shower head at desired height above finished floor.

**Valve:** 1" IPS brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm, 85" stainless steel pull rod and stainless steel ceiling guide plate.

**Pipe and Fittings:** Exposed pipe is brushed stainless steel (ESBF658) or polished chrome plated brass (ESBF658PCC).


**Supply:** 1" NPT female inlet.

**Sign:** ANSI-compliant identification sign.

### Available Options

- TM6040** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
- AP280-230** Electric strobe light and alarm horn unit for recess mounting in finished wall. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.

- **ESBF658** Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head and Pipe
- **ESBF658PCC** Barrier-Free Emergency Shower, Semi-Concealed, Stainless Steel Shower Head, Polished Chrome Plated Pipe

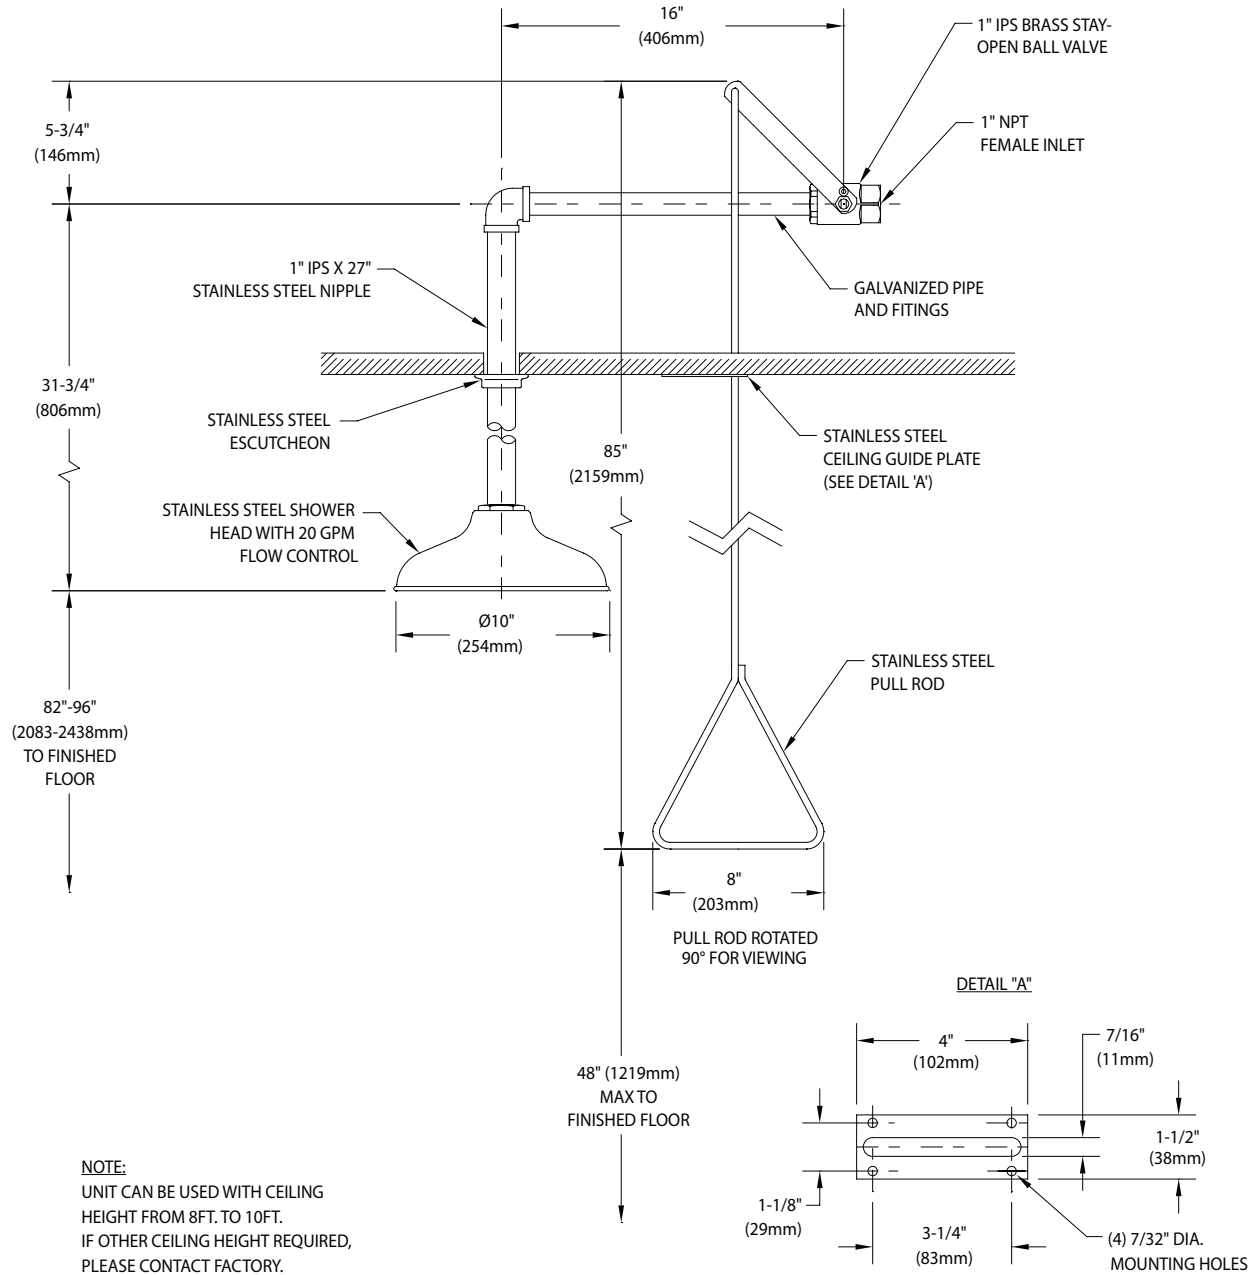

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 1/4"$  (6mm). rev. 062018

