

### **ES691** Emergency Shower, Horizontally Mounted, All-Stainless Steel

**Application:** All-stainless steel emergency shower for horizontal mounting. Ideal for use in areas where highly corrosive materials are handled, as well as in laboratory and clean room applications.

**Shower Head:** 10" diameter stainless steel with 20 GPM flow control.

**Valve:** 1" IPS stainless steel stay-open ball valve. Valve has stainless steel ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

**Pipe and Fittings:** Schedule 40 stainless steel.

**Supply:** 1" NPT female inlet.


**Sign:** ANSI-compliant identification sign.

#### Available Options

- TM6040** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
- PSH** Orange ABS plastic shower head.
- AP280-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- AP250-015** Modesty curtain for horizontal shower installation.



**ES691** Emergency Shower, Horizontally Mounted, All-Stainless Steel

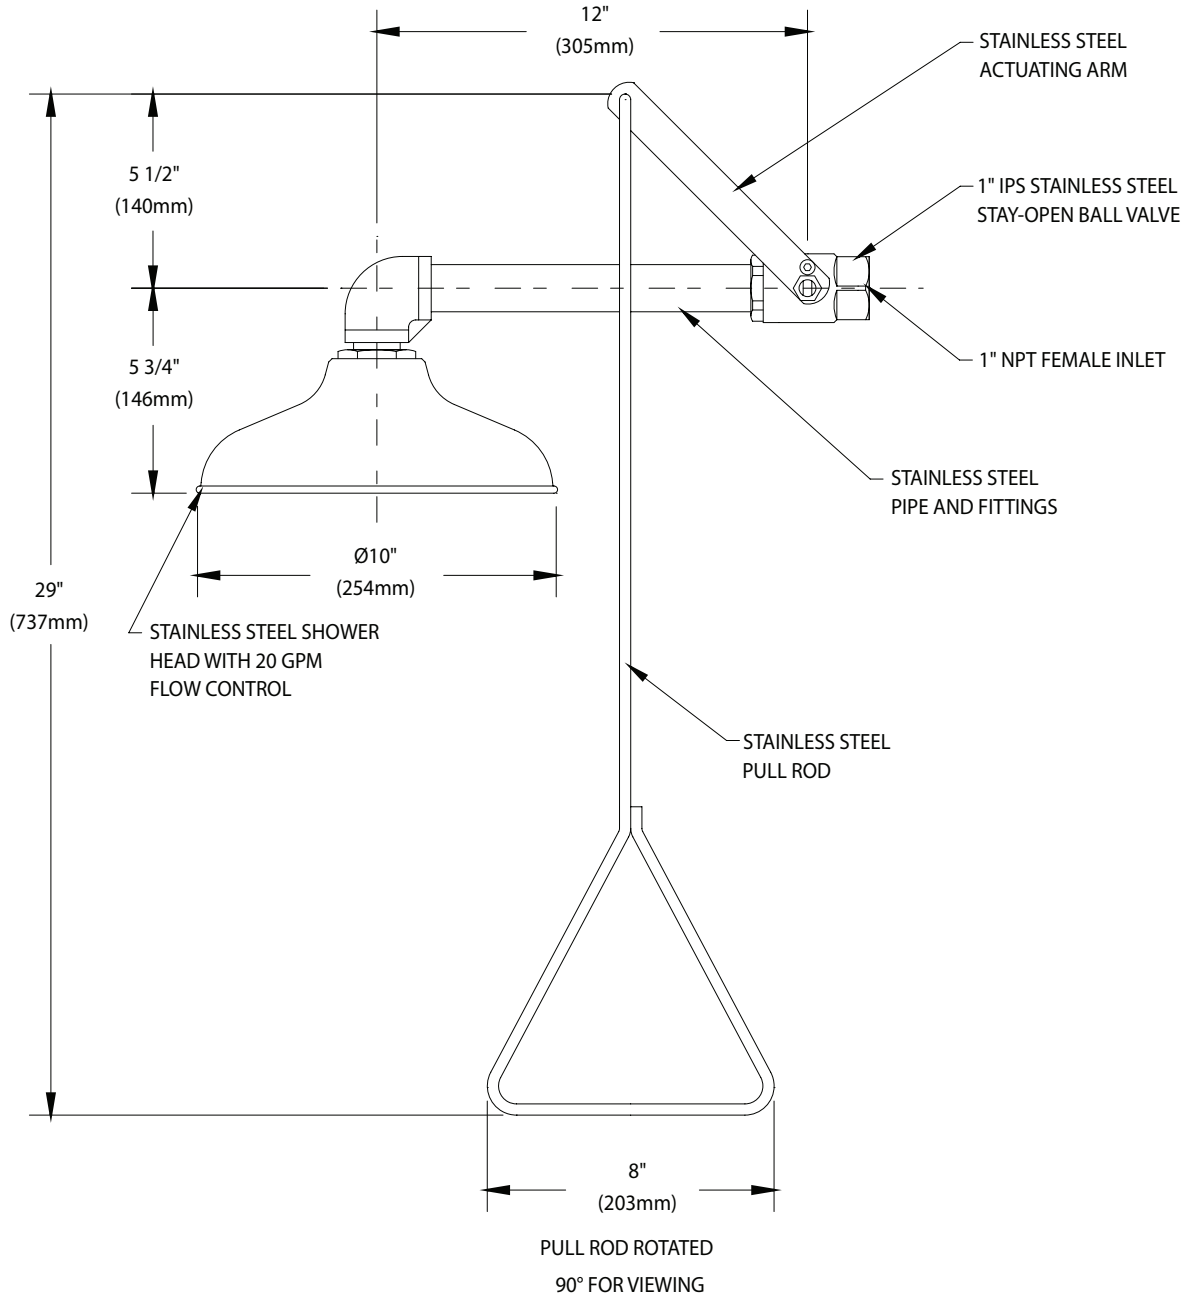

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 1117