WideArea[™] Eye/Face Washes



□ FE704BC WideArea™ Eye/Face Wash, Pedestal Mounted, Stainless Steel Bowl and Cover

Application: Free standing, pedestal mounted WideArea™ eye/face wash. Unit has stainless steel cover to protect bowl from dust, dirt and other contaminants. Four GS-Plus™ spray-type outlet heads deliver a flood of water over a wide area of coverage for complete rinsing of eyes and face.

Spray Head Assembly: Four GS-Plus[™] spray heads. Each head has an internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Bowl: 11-1/2" stainless steel with bowl cover. Cover is raised automatically when flag handle is activated. Cover closes when handle is returned to closed position.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene pipe covers for high visibility and corrosion resistance.

Supply: 1/2" NPT female inlet.

Waste: 1-1/4" NPT female outlet.

Sign: ANSI-compliant identification sign.

Quality Assurance: Valve, bowl and spray head assembly is factory assembled and water tested prior to shipment.

Available Options

- **TM6020** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
- **HFC** Hand and foot control. Eye/face wash is activated by flag handle or foot treadle.
- HS Auxiliary hand-held drench hose for rinsing eyes, face or body.




312 666 5500 TELEPHONE 312 666 5501 FACSIMILE wsflab.com





WideArea[™] Eye/Face Washes



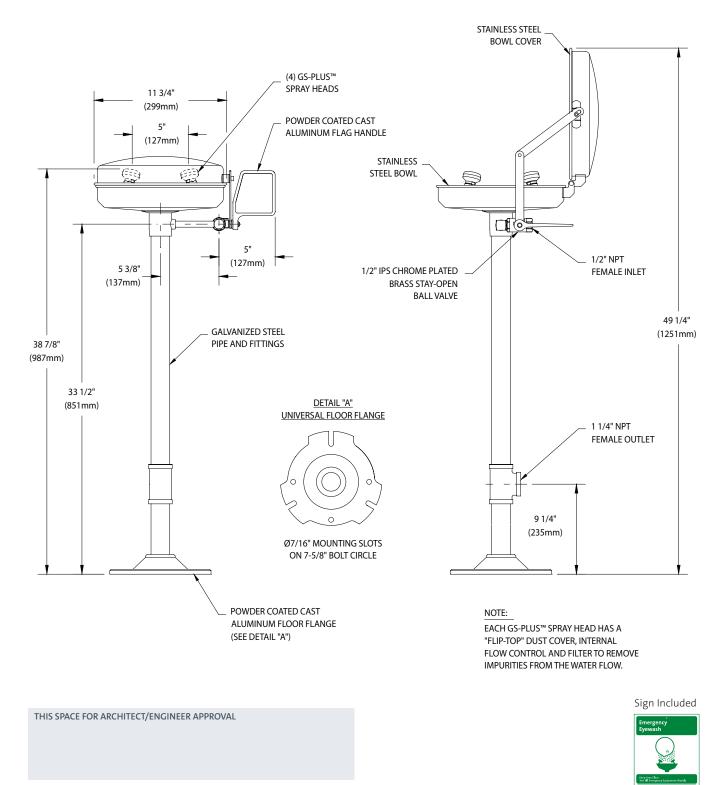

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are \pm 1/4" (6mm). rev. 0422

WaterSaver Faucet Co. 701 W Erie St Chicago, IL 60654

312 666 5500 TELEPHONE 312 666 5501 FACSIMILE wsflab.com Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

