

## BT4160-158WSA Lift/Turn Gas Valve, Wall/Panel/Overhead Mounted



**Application:** Flow control of burning or combustible gases such as natural gas, propane and bottled gas. Valve is certified for natural gas service by CSA International.

**Mounting:** Inlet flange with locator pins.

**Valve Body:** Straight pattern forged brass.

**Headwork:** Quarter-turn ball valve construction with stainless steel valve stem, chrome plated brass ball and molded PTFE seals. Valve locks in closed position.

**Handle:** Spring-loaded molded nylon handle with brass insert and index disc. Handle locks in closed position. Handle must be pulled up to unlock and turned to open valve. Handle alignment indicates if valve is open or closed. Handle and index are color coded and marked per EN 13792.

**Inlet:** Furnished with G1/2 mounting shank, locknut and washer. G1/2 male inlet.

**Outlet:** BT4160 has integral (nonremovable) serrated hose end. BT4163H has integral quick connect fitting with serrated hose end.

**Quality Assurance:** Fitting is fully assembled and factory tested prior to shipment. 10 bar (150 PSI) test pressure and 7 bar (100 PSI) maximum working pressure.

### Ordering Information

#### Outlet Fitting Options

Serrated hose end	<input type="checkbox"/> BT4160-158WSA
Quick connect fitting with hose end	<input type="checkbox"/> BT4163H-158WSA

**Note:** If internal check valve to prevent backflow is required, add suffix "CV" to model number.

#### Product Finish


<input type="checkbox"/> WHT	Gloss white powder coated finish	<input type="checkbox"/> PCL	Polished chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRY	Gloss light gray powder coated finish	<input type="checkbox"/> SCC	Satin chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRD	Gloss dark gray powder coated finish	<input type="checkbox"/> SNC	Satin nickel plated finish with clear epoxy coating
<input type="checkbox"/> STM	Starburst metallic powder coated finish		

**Note:** Refer to "Product Finishes" catalog for complete information on finishes.

#### Media

☐ \_\_\_\_\_

**BT4160-158WSA** Lift/Turn Gas Valve, Wall/Panel/Overhead Mounted

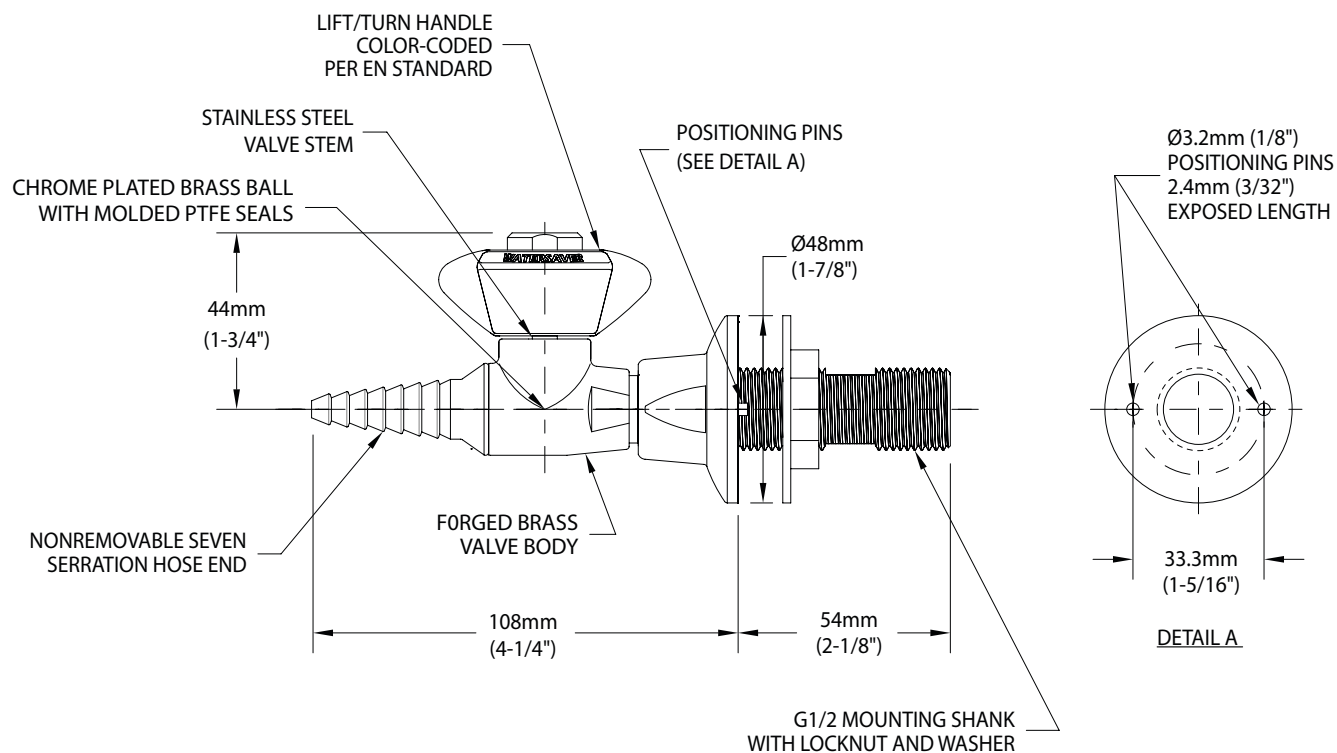

**NOTES:**

1. FITTING IS FACTORY ASSEMBLED AND TESTED AT 10 BAR (150 PSI). MAXIMUM WORKING PRESSURE IS 7 BAR (100 PSI).

Rev. 052318

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 6\text{mm}$  (1/4"). Rev. 071618