


BT6833 Pure Water Tap, Bench Mounted

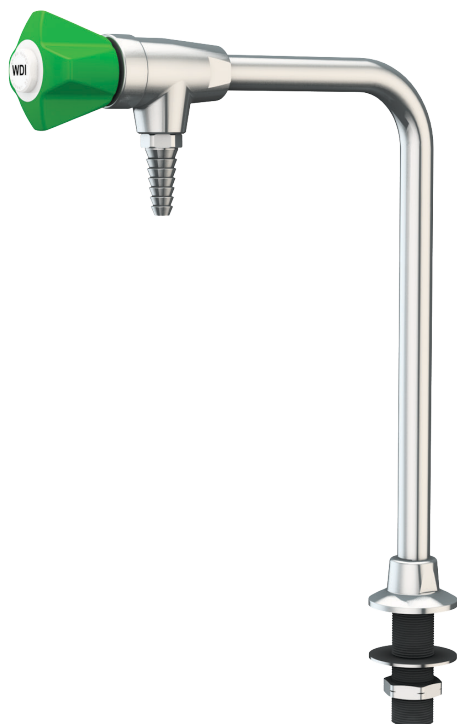

Application: Laboratory tap for distilled, deionised or reverse osmosis water. All components in contact with pure water are stainless steel.

Mounting: Bench or countertop mounted with locator pins.

Body: Stainless steel.

Headwork: WaterSaver self-contained valve cartridge with replaceable stainless steel seat.

Handle: Molded nylon hooded style handle with index disc. Handle and index disc are color coded and marked per EN 13792.

Inlet: Furnished with G1/2 mounting shank, locknut and washer. G1/2 male inlet.

Outlet: G3/8 female outlet with removable anti-splash serrated hose end.

Quality Assurance: Fitting is fully assembled and factory tested prior to shipment. 10 bar (150 PSI) test pressure and maximum working pressure.

Ordering Information

Options

Valve Construction	Compression (manual on/off) control	<input type="checkbox"/> BT6833
	Self-closing control	<input type="checkbox"/> BT6833SC
Riser	Riser with 200mm (8") spread in place of 150mm (6")	<input type="checkbox"/> BT6833-8

Product Finish


<input type="checkbox"/> SS	Satin stainless steel finish	<input type="checkbox"/> GRD	Gloss dark gray powder coated finish
<input type="checkbox"/> WHT	Gloss white powder coated finish	<input type="checkbox"/> STM	Starburst metallic powder coated finish
<input type="checkbox"/> GRY	Gloss light gray powder coated finish		

Note: Refer to "Product Finishes" catalog for complete information on finishes.

Media

☐ _____

BT6833 Pure Water Tap, Bench Mounted

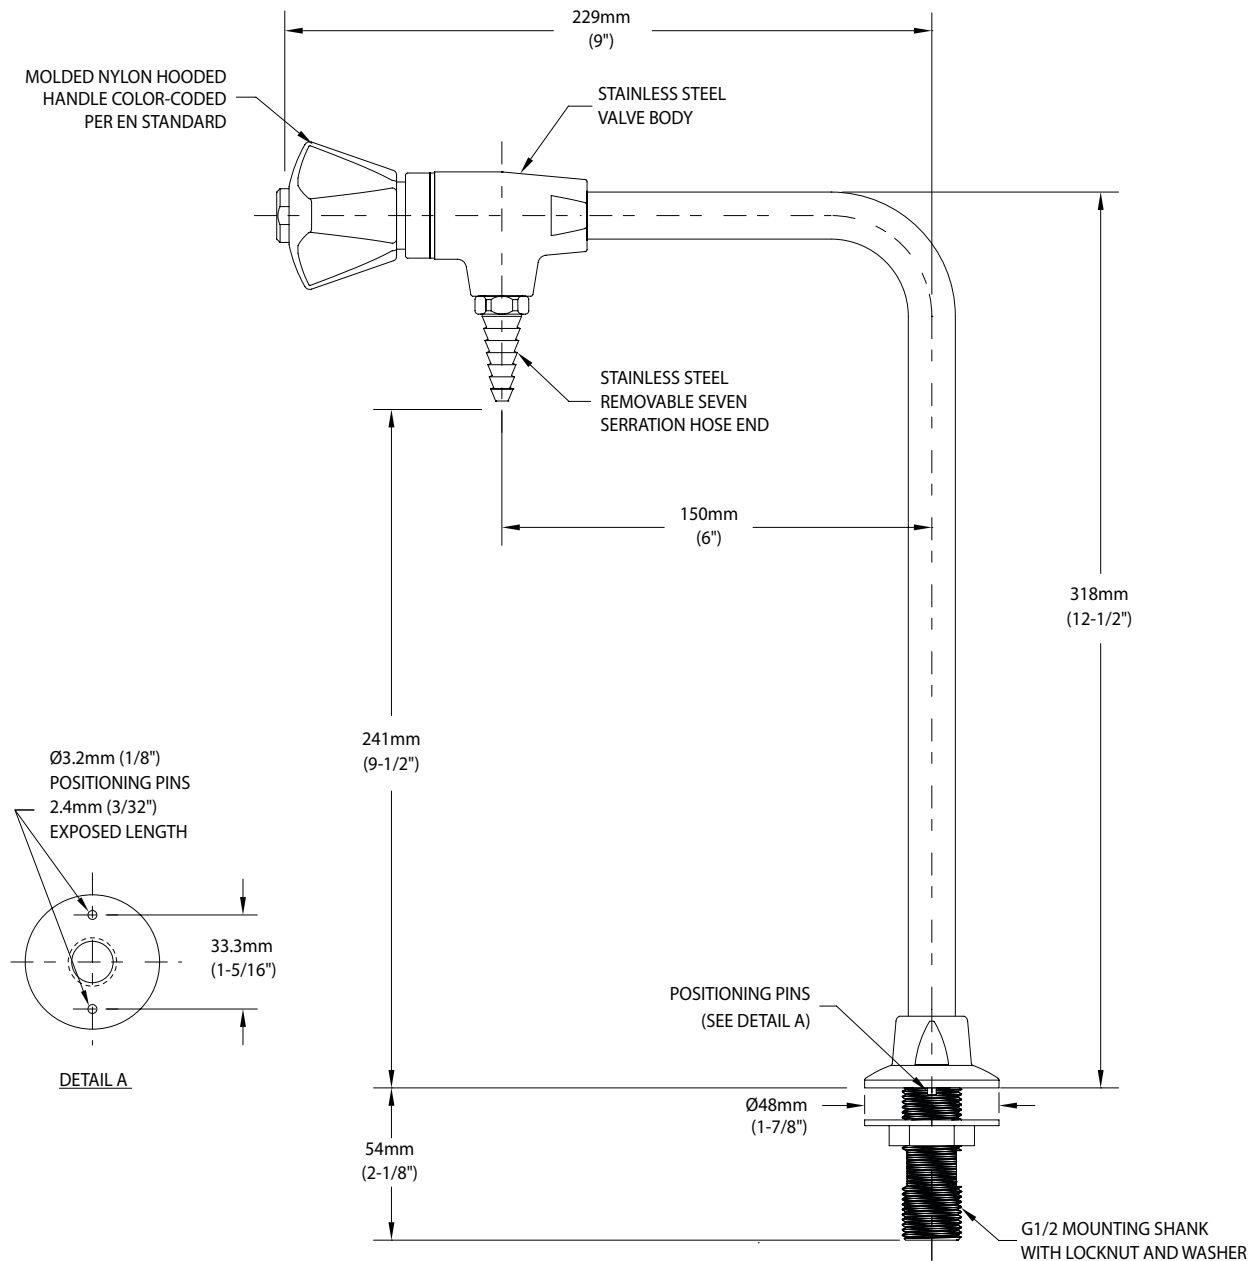

NOTES:

1. FITTING HAS STAINLESS STEEL CONSTRUCTION.
2. FITTING IS FULLY ASSEMBLED AND FACTORY TESTED PRIOR TO SHIPMENT.
3. MAXIMUM WORKING PRESSURE IS 10 BAR (150 PSI).

Rev. 122818

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 6\text{mm}$ (1/4"). Rev. 092118