

**BT3133** Pure Water Tap, Bench Mounted



**Application:** Laboratory tap for distilled, deionised or reverse osmosis water. All components in contact with pure water have interior lining of pure tin.

**Mounting:** Bench or countertop mounted with locator pins.

**Body:** Forged brass.

**Headwork:** WaterSaver self-contained valve cartridge with replaceable stainless steel seat.

**Handle:** Molded nylon hooded style handle with index disc. Handle and index disc are color coded and marked per EN 13792.

**Inlet:** Furnished with G1/2 mounting shank, locknut and washer. G1/2 male inlet.

**Outlet:** G3/8 female outlet with removable anti-splash serrated hose end.

**Quality Assurance:** Fitting is fully assembled and factory tested prior to shipment. 10 bar (150 PSI) test pressure and maximum working pressure.

**Ordering Information**

**Options**

<b>Valve Construction</b>	Compression (manual on/off) control	<input type="checkbox"/> BT3133
	Self-closing control	<input type="checkbox"/> BT3133SC
<b>Riser</b>	Riser with 200mm (8") spread in place of 150mm (6")	<input type="checkbox"/> BT3133-8
<b>Outlet Fitting</b>	BO055 aerator in place of hose end	<input type="checkbox"/> BT3133-55
	BT118 pipe interrupter fitting with hose end	<input type="checkbox"/> BT3133-118

**Product Finish**


<input type="checkbox"/> WHT	Gloss white powder coated finish	<input type="checkbox"/> PCL	Polished chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRY	Gloss light gray powder coated finish	<input type="checkbox"/> SCC	Satin chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRD	Gloss dark gray powder coated finish	<input type="checkbox"/> SNC	Satin nickel plated finish with clear epoxy coating
<input type="checkbox"/> STM	Starburst metallic powder coated finish		

**Note:** Refer to "Product Finishes" catalog for complete information on finishes.

**Media**

\_\_\_\_\_

BT3133 Pure Water Tap, Bench Mounted

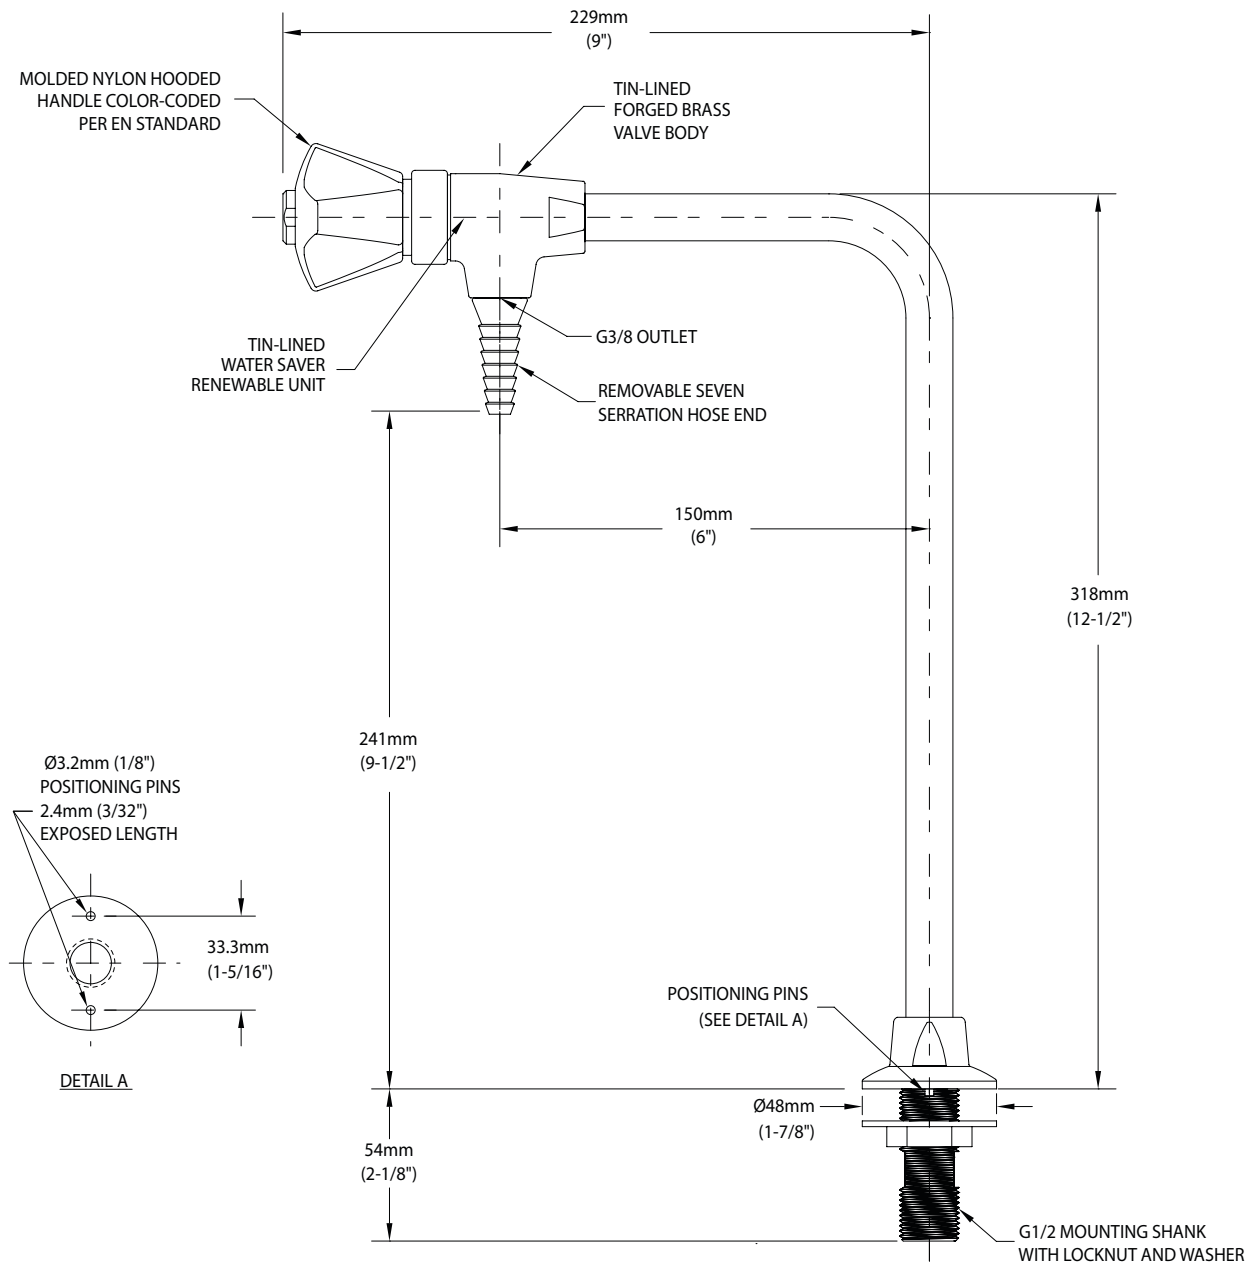

NOTES:

1. FITTING HAS INTERIOR LINING OF PURE TIN.
2. FITTING IS FULLY ASSEMBLED AND FACTORY TESTED PRIOR TO SHIPMENT.
3. MAXIMUM WORKING PRESSURE IS 10 BAR (150 PSI).

Rev. 050318

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 6\text{mm}$  (1/4"). Rev. 102318