

BT414 Mixer Tap, Bench Mounted



Application: Laboratory water mixer tap for hot and cold water.

Mounting: Bench or countertop mounted with locator pins.

Body: Forged brass.

Headworks: WaterSaver self-contained compression valve cartridges with replaceable stainless steel seats.

Handles: Molded nylon hooded style handles with index discs. Handles and indexes are color coded and marked per EN 13792.

Gooseneck: 150mm (6") convertible rigid/swing gooseneck.

Inlets: (2) 10mm OD flexible copper tubes. Furnished complete with 30.5mm (1-3/16") dia. mounting shank, locknut and washer.

Outlet: G3/8 female outlet with removable anti-splash serrated hose end.

Quality Assurance: Fitting is fully assembled and factory tested prior to shipment. 10 bar (150 PSI) test pressure and maximum working pressure.

Ordering Information

Options

Valve Construction	Compression valve cartridge	<input type="checkbox"/> BT414
	Ceramic disc valve cartridge	<input type="checkbox"/> BTC414
Gooseneck	200mm (8") gooseneck in place of 150mm (6")	<input type="checkbox"/> BT414-8
Outlet Fitting	BO055 aerator in place of hose end	<input type="checkbox"/> BT414-55
	BT118 pipe interrupter fitting with hose end	<input type="checkbox"/> BT414-118
Inlet Connections	Braided stainless steel flexible connectors in place of copper tubes	<input type="checkbox"/> BT414HSP


Product Finish

<input type="checkbox"/> WHT	Gloss white powder coated finish	<input type="checkbox"/> PCL	Polished chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRY	Gloss light gray powder coated finish	<input type="checkbox"/> SCC	Satin chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRD	Gloss dark gray powder coated finish	<input type="checkbox"/> SNC	Satin nickel plated finish with clear epoxy coating
<input type="checkbox"/> STM	Starburst metallic powder coated finish		

Note: Refer to "Product Finishes" catalog for complete information on finishes.

Media

BT414 Mixer Tap, Bench Mounted

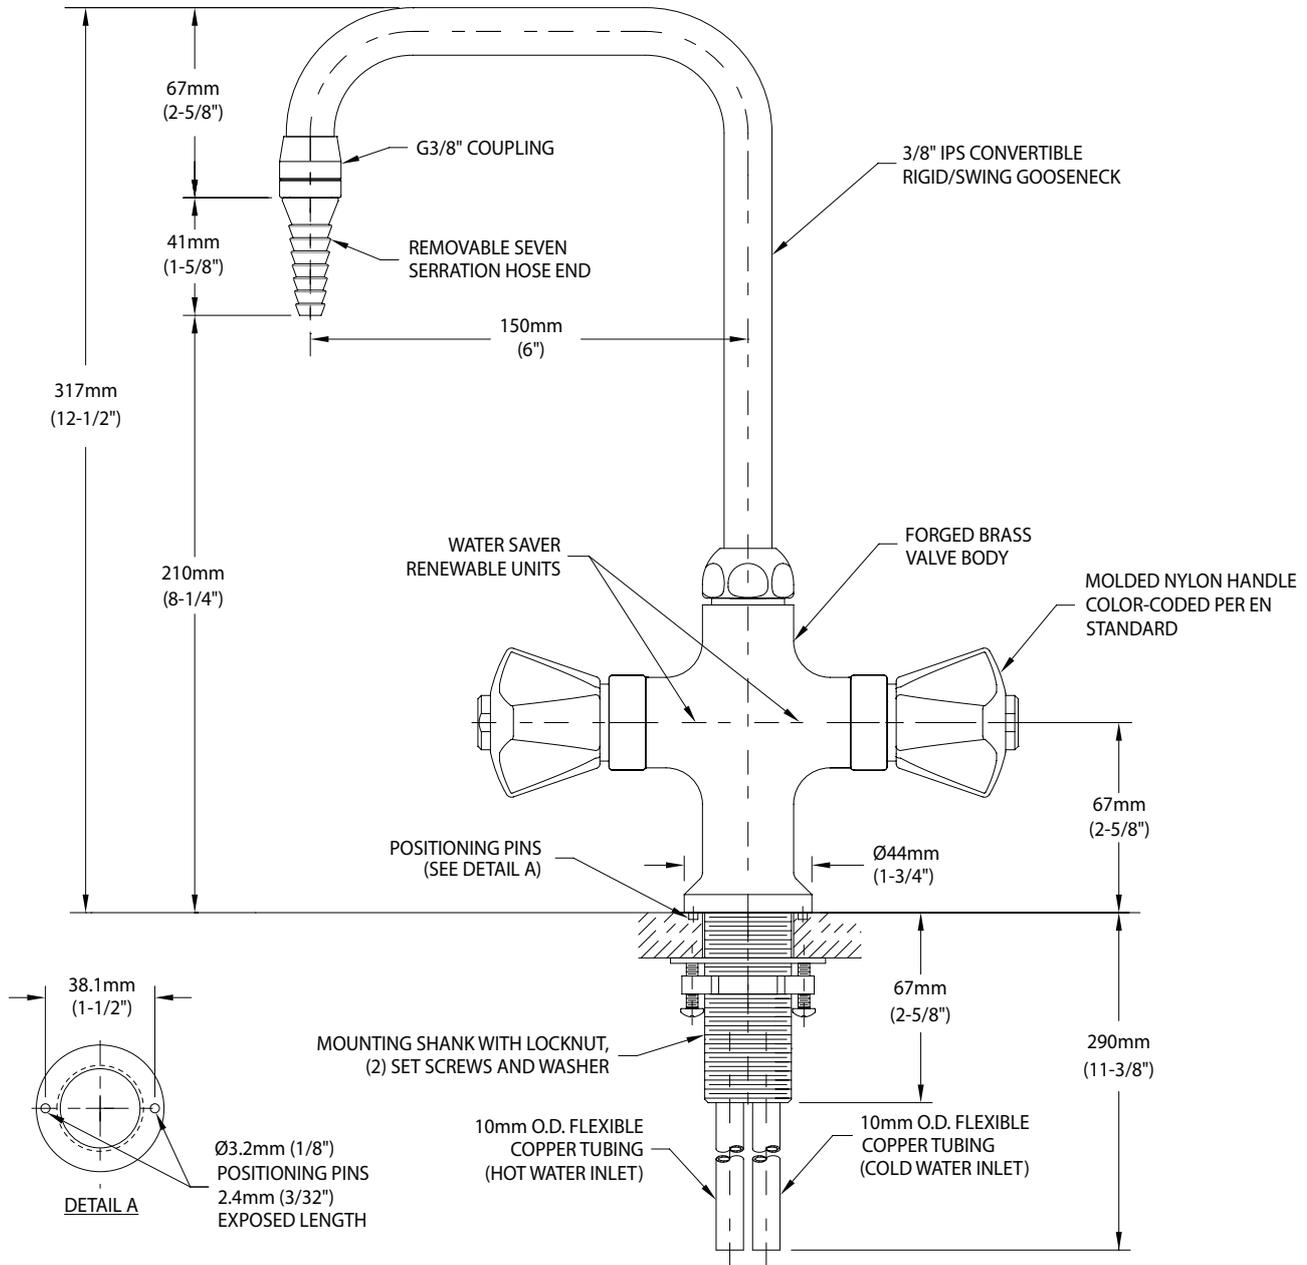

- NOTES:**
1. FITTING IS FULLY ASSEMBLED AND FACTORY TESTED PRIOR TO SHIPMENT.
 2. MAXIMUM WORKING PRESSURE IS 10 BAR (150 PSI).

Rev. 010219

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 6mm (1/4"). Rev. 081718