

BT5100F-226WSA Water Valve, Wall/Panel Mounted



Application: Laboratory water valve fitting for wall or panel mounting.

Mounting: Flanged inlet with locator pins.

Valve Body: Angle pattern forged brass.

Headwork: WaterSaver self-contained compression valve cartridge with replaceable stainless steel seat.

Handle: Molded nylon hooded style handle with index disc. Handle and index are color coded and marked per EN 13792.

Inlet: Furnished with G1/2 mounting shank, locknut and washer. G1/2 male inlet.

Outlet: G3/8 female outlet with removable anti-splash serrated hose end.

Quality Assurance: Fitting is fully assembled and factory tested prior to shipment. 10 bar (150 PSI) test pressure and maximum working pressure.

Ordering Information

Valve Construction Options

Compression valve cartridge	<input type="checkbox"/> BT5100F-226WSA
Ceramic disc valve cartridge	<input type="checkbox"/> BTC5100F-226WSA
Internal check valve to prevent backflow	<input type="checkbox"/> BT5100F-CV-226WSA

Product Finish


<input type="checkbox"/> WHT Gloss white powder coated finish	<input type="checkbox"/> PCL Polished chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRY Gloss light gray powder coated finish	<input type="checkbox"/> SCC Satin chrome plated finish with clear epoxy coating
<input type="checkbox"/> GRD Gloss dark gray powder coated finish	<input type="checkbox"/> SNC Satin nickel plated finish with clear epoxy coating
<input type="checkbox"/> STM Starburst metallic powder coated finish	

Note: Refer to "Product Finishes" catalog for complete information on finishes.

Media



BT5100F-226WSA Water Valve, Wall/Panel Mounted

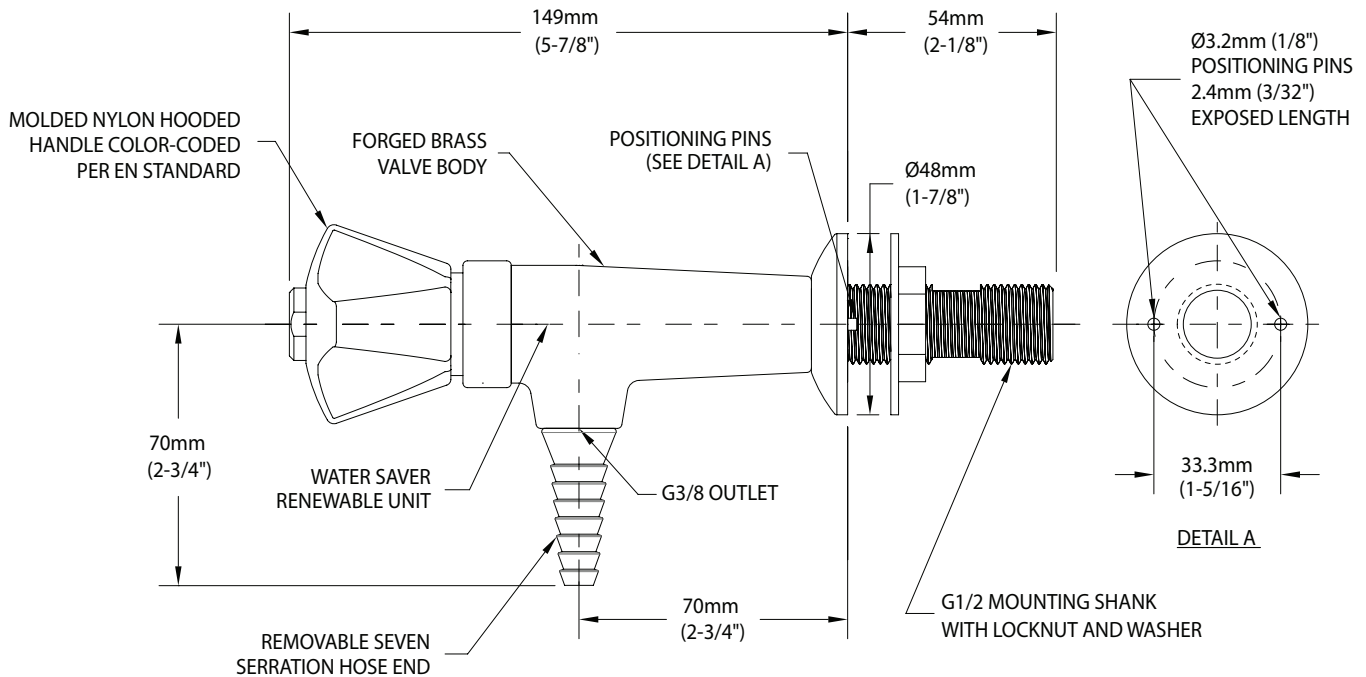

NOTES:

1. FURNISHED WITH THREADED ESCUTCHEON, MOUNTING SHANK, LOCKNUT AND WASHER FOR SECURING TO PANEL.
2. FITTING IS FULLY ASSEMBLED AND FACTORY TESTED PRIOR TO SHIPMENT.
3. MAXIMUM WORKING PRESSURE IS 10 BAR (150 PSI).

Rev. 052318

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 6\text{mm}$ (1/4"). Rev. 071718