

WaterSaver | ColorTech

CT3180-141FT

NEEDLE VALVE ASSEMBLY, WALL MOUNTED DOUBLE, BRASS FLOATING ESCUTCHEON

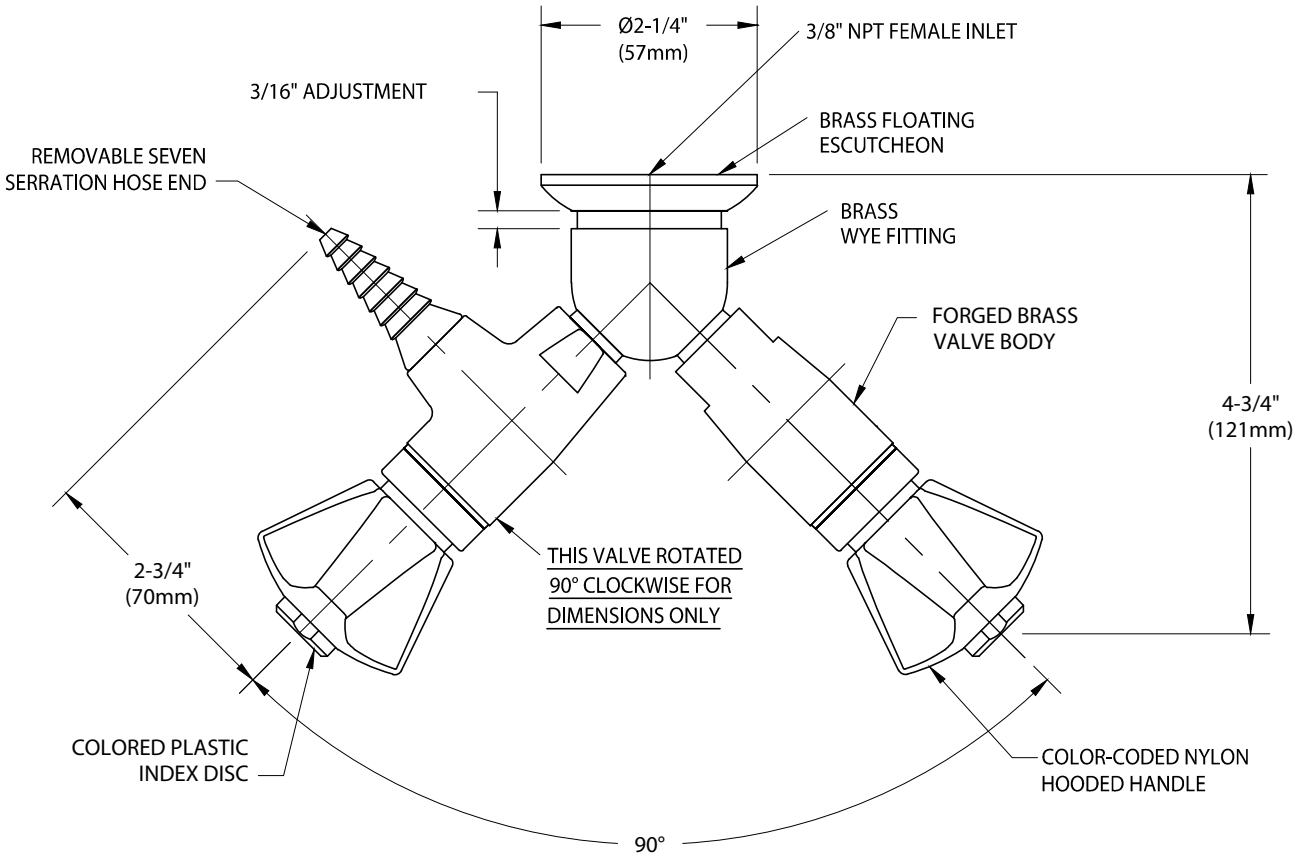

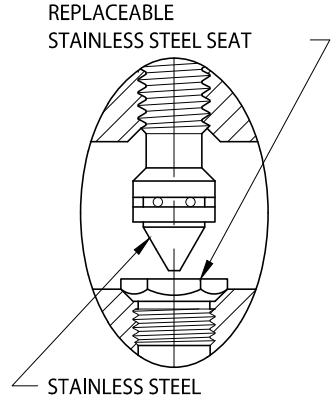

MEASUREMENTS MAY VARY ±1/4" (6mm).

NOTES:

1. FIXTURE HAS FEMALE INLET FOR CONNECTION TO SUPPLY. FLOATING ESCUTCHEON IS THREADED TO WALL TO CONCEAL ANY GAP BETWEEN VALVE AND WALL.
2. VALVE IS CERTIFIED BY CSA INTERNATIONAL TO COMPLY WITH ANSI 21.15 AND CGA 9.1.
3. FIXTURE IS FULLY ASSEMBLED AND FACTORY TESTED AT 250 PSI NITROGEN PRESSURE. MAXIMUM WORKING PRESSURE IS 150 PSI.
4. SPECIFY IF CLEANING FOR OXYGEN AND HIGH PURITY GASES IS REQUIRED.
5. FIXTURE HAS COLORTECH EPOXY POWDER COATED FINISH. SPECIFY COLOR (WHITE, GRAY OR TAN) WHEN ORDERING.

WaterSaver Faucet Co.
701 West Erie Street
Chicago, IL 60654
312 666 5500 t
312 666 5501 f
wsflab.com

Drawing Number:

Revised: 012313-TEC