



ES662	Emergency	Shower,	Free S	tanding,	Plastic Sh	ower l	Head

☐ **ES662SSH** Emergency Shower, Free Standing, Stainless Steel Shower Head

Application: Free standing emergency shower.

Shower Head: 10" diameter with 20 GPM flow control. Shower head is orange ABS plastic (ES662) or stainless steel (ES662SSH).

Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers on piping for high visibility and corrosion resistance.


Supply: 11/4" NPT female top or side inlet. **Sign:** ANSI-compliant identification sign.

Available Options

■ TM6040 Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
PCC All-polished chrome plated brass construction.
GRN Safety green ABS plastic shower head.
YEL Safety yellow ABS plastic shower head.
HS Auxiliary hand-held drench hose for rinsing eyes, face of body. Unit has single FS-Plus™ spray type outlet head, self-closing valve with squeeze handle, 8 ft. reinforced PVC hose and mounting bracket.
AP275-200 Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete

with flow switch and mounting hardware.

AP250-015 Modesty curtain for horizontal shower

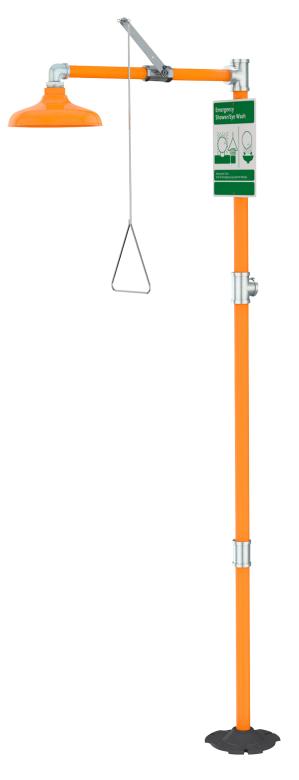


installation.







- ☐ **ES662** Emergency Shower, Free Standing, Plastic Shower Head
- ☐ **ES662SSH** Emergency Shower, Free Standing, Stainless Steel Shower Head

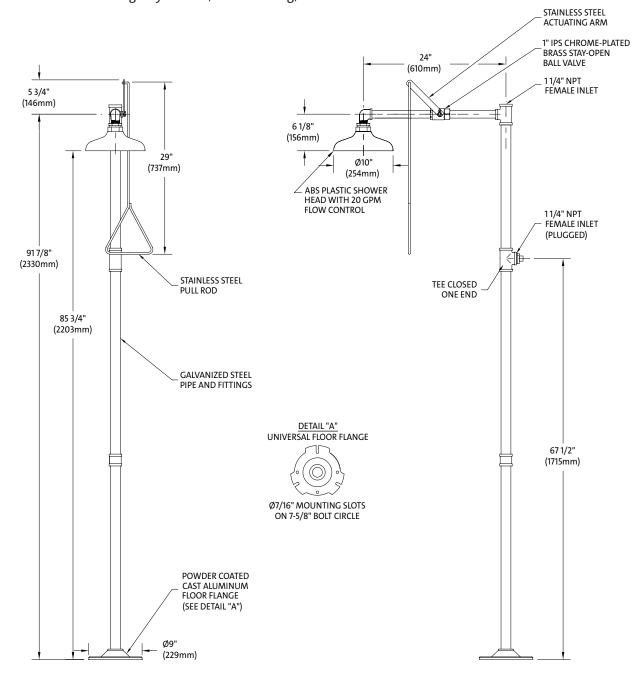

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are \pm 1/4" (6mm).

Sign Included



