

- VREW1020** Vandal-Resistant Drench Hose Unit, Deck Mounted, PVC Hose
- VREW1020FSH** Vandal-Resistant Drench Hose Unit, Deck Mounted, Stainless Steel Hose

Application: Vandal-resistant drench hose unit for deck mounting. Ideal for use in schools and other areas where equipment might be subject to abuse. *Note: Under ANSI Z358.1-2014, drench hose units supplement, but do not replace, other types of emergency equipment.*

Spray Head Assembly: Single vandal-resistant FS-Plus™ spray head. Spray head has brass body, stainless steel “flip top” dust cover, internal flow control and filter to remove impurities from the water flow. Spray head has retaining ring with set screw to protect internal components.

Valve: Forged brass squeeze valve activated by stainless steel lever handle. Valve has replaceable stainless steel seat for exceptional durability. Valve closes when lever handle is released.

Hose: 8’ reinforced PVC hose (VREW5020) or flexible stainless steel hose (VREW5020FSH). 275 PSI maximum working pressure.

Mounting: Deck flange for countertop mounting. Flange has handle locator guide to position handle to face forward at all times.

Supply: 3/8” NPT male swivel-type inlet.

Sign: ANSI-compliant identification sign.


Quality Assurance: Unit is completely assembled and water tested prior to shipment.

Available Options

- TM6020** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to “Thermostatic Mixing Valves” section for complete technical and product selection information.
- BP** In-line dual check backflow preventer installed on inlet of hose. *Note: Check with local code authority for compliance with local plumbing code.*
- HG** Undercounter hose guide bracket to prevent hose from tangling or binding.
- VB** In-line vacuum breaker for installation between valve and spray head.



- **VREW1020** Vandal-Resistant Drench Hose Unit, Deck Mounted, PVC Hose
- **VREW1020FSH** Vandal-Resistant Drench Hose Unit, Deck Mounted, Stainless Steel Hose

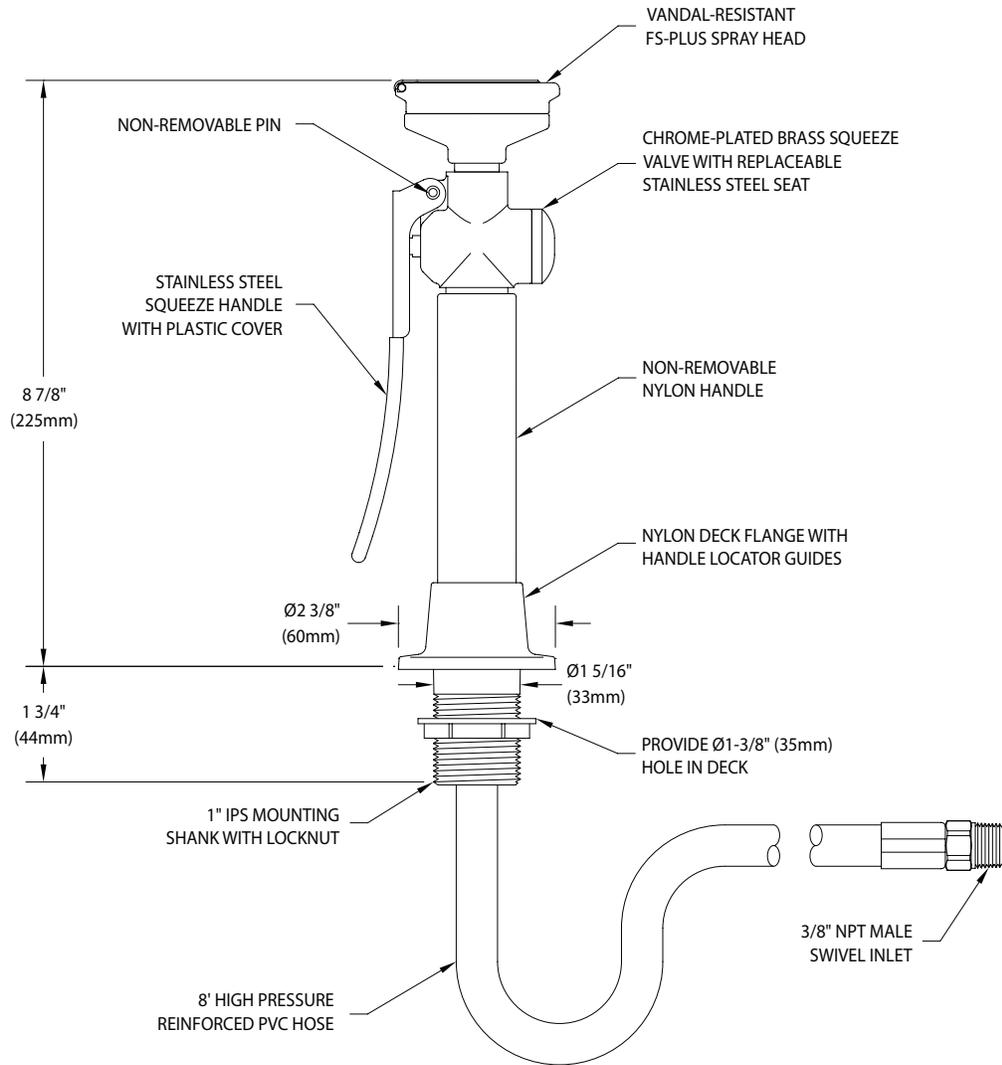

NOTES:

1. UNIT HAS VANDAL-RESISTANT CONSTRUCTION. ALL CONNECTIONS ARE SECURED WITH SET SCREWS OR CEMENT TO PREVENT DISASSEMBLY.
2. EACH VANDAL-RESISTANT FS-PLUS™ SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.
3. HOSE SHOULD NOT BE USED IN APPLICATIONS WHERE WATER PRESSURE EXCEEDS 90 PSI. HOSE SHOULD BE INSPECTED PERIODICALLY FOR DETERIORATION.

Rev. 110818

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm). rev. 040819

